


# CAN YOUR PVC DO THIS?



POLYFLUE  
POLYPROPYLENE  
FLEXIBLE LINER

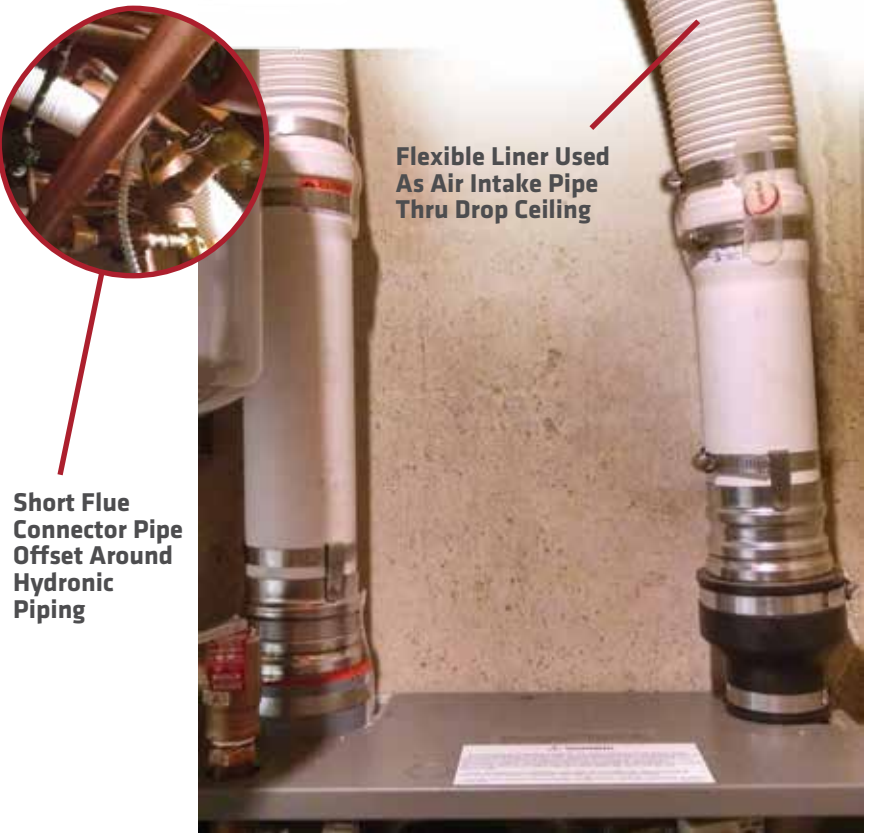

Short Flue Connector Pipe Offset Around Hydronic Piping

Flexible Liner Used As Air Intake Pipe Thru Drop Ceiling

Polyflue Polypropylene (PP) Vent Systems can do the extraordinary compared to any PVC vent pipe system.

Polyflue Flexible Liner is used to vent category II & IV condensing gas-fired heating appliances (up to 230F) into masonry chimneys, inactive metal vents, or wood chases at 0" clearance. Polyflue Flexible Liner can also be used as a convenient combustion air pipe run to appliances. PVC doesn't offer flexible venting for these challenging installations.

Listed to ULC S636 venting standard. Pre-gasketed single wall rigid pipe, fittings, adapters, and flexible liner are available in diameters 2" (60mm), 3" (80mm), and 4" (100mm).



(800) 992-8368  
[polyflue.com](http://polyflue.com)



Installation Into A Masonry Chimney With An Offset (not shown)

